


# NOISE IN RESISTORS

K. KUHN  
2-28-00

- AT ANY TEMPERATURE ABOVE 0°K THERE IS RANDOM MOTION OF CHARGES DUE TO THERMAL AGITATION. THE MOTION IS PROPORTIONAL TO TEMPERATURE. THE RESULT OF THIS MOTION IS A RANDOM VOLTAGE ACROSS THE RESISTOR, THIS RANDOM VOLTAGE IS CALLED NOISE. THE NOISE HAS A GAUSSIAN DISTRIBUTION OF AMPLITUDES.

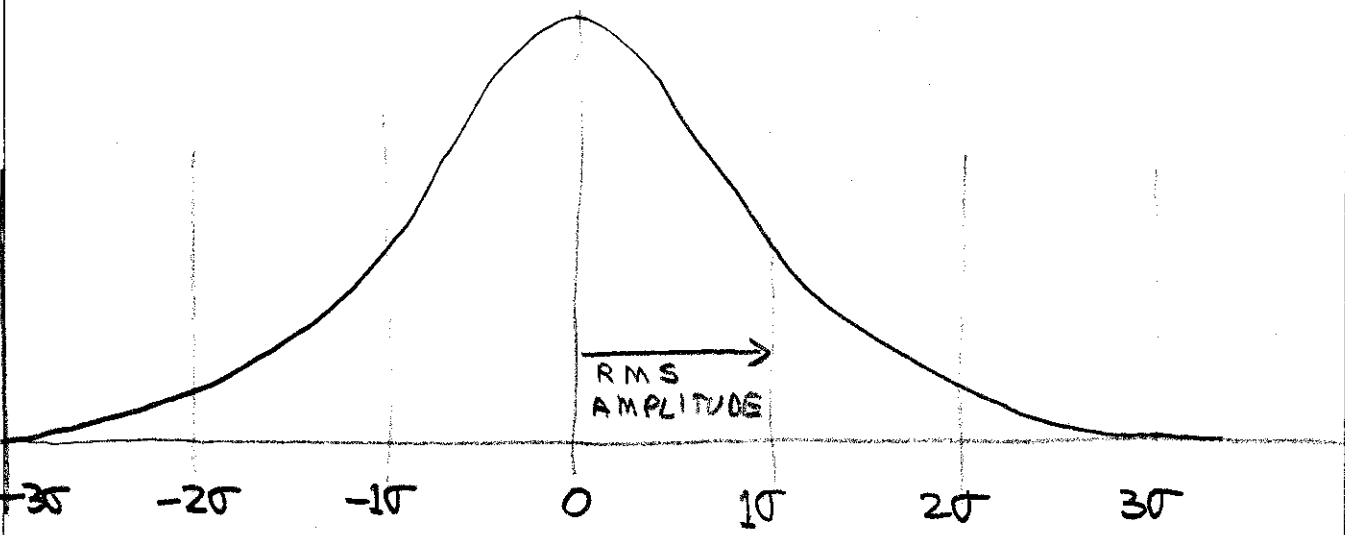

THE AMPLITUDE DISTRIBUTION IS WITHIN ±30 (99.7%) OF THE TIME. THIS MEANS THAT THE RMS VALUE OF THE NOISE IS APPROXIMATELY 1/6 THE PEAK TO PEAK VALUE. THE RMS VALUE OF THE NOISE CAN BE COMPUTED FROM;

$$V_n = \sqrt{4KT\Delta FR}$$

Eq 1

OHMS  
 HERTZ - EFFECTIVE BANDWIDTH IN HZ  
 °K  
 $1.38 \times 10^{-23}$  J/°K BOLTZMANN'S CONSTANT

NOTE THAT  $(kT\Delta f)$  HAS UNITS OF WATTS. FROM A COMBINATION OF OHM'S AND WATT'S LAW,  $P = E^2/R$  OR  $E = \sqrt{PR}$ . NOTE THAT THE LATTER EQUATION IS JUST WHAT WE HAVE. A FEW EXAMPLES; ( $T = 300^\circ\text{K}$  OR  $27^\circ\text{C}$ ).

①  $600\Omega$ ,  $20\text{kHz}$  BW ( $\Delta f$ ) (Typical audio system)

$$V_n = 446\text{nV}_{\text{rms}} \quad P_n = 331\text{aW} \quad \text{OR} \quad -125\text{dBm}$$

②  $1\text{M}\Omega$ ,  $100\text{MHz}$  (Typical oscilloscope)

$$V_n = 1.3\text{mV}_{\text{rms}} \quad P_n = 1.7\text{pW} \quad \text{OR} \quad -88\text{dBm}$$

③  $50\Omega$ ,  $100\text{MHz}$   $\updownarrow$  independent of resistance

$$V_n = 9.1\mu\text{V}_{\text{rms}} \quad P_n = 1.7\text{pW} \quad \text{OR} \quad -88\text{dBm}$$

④  $50\Omega$ ,  $3\text{kHz}$  good shortwave receiver (voice)

$$V_n = 50\text{nV}_{\text{rms}} \quad P_n = 50\text{aW} \quad \text{OR} \quad -133\text{dBm}$$

NOISE REPRESENTS A LIMIT TO HOW WEAK A SIGNAL THAT CAN BE DETECTED. FOR RELIABLE PROCESSING A SIGNAL GENERALLY NEEDS TO BE STRONGER THAN THE NOISE BY TYPICALLY A FACTOR OF 2 BUT FOR AUDIO OR VIDEO SYSTEMS A FACTOR OF ABOUT 100 IS THE MINIMUM ACCEPTABLE (THE FACTORS ARE POWER RATIOS). THIS IS CALLED THE SIGNAL TO NOISE RATIO.

WHEN RESISTANCE IS NOT A VARIABLE AND BANDWIDTH IS, WE OFTEN MODIFY EQ 1 TO HAVE UNITS OF  $V/\sqrt{Hz}$  (PRONOUNCED VOLTS PER ROOT HERTZ). WE USE A DF OF 1 Hz AND OBTAIN THE FOLLOWING.

$$V_n / \sqrt{Hz} = \sqrt{4KTR} \quad \text{Eq 2.}$$

TO OBTAIN THE ACTUAL NOISE VOLTAGE, WE MULTIPLY BY THE SQUARE-ROOT OF THE BANDWIDTH BEING USED. CONSIDER EX. 3 & 4 OF BEFORE.

FOR A 50  $\Omega$  SYSTEM THE NOISE VOLTAGE IS  $910 \mu V / \sqrt{Hz}$ . THEN FOR 100 MHz BW WE MULTIPLY BY  $\sqrt{100 MHz}$  TO OBTAIN 9.1  $\mu V$ . FOR 3 kHz BW WE MULTIPLY BY  $\sqrt{3 kHz}$  TO OBTAIN 50 nV.

---

ONE WAY TO OBTAIN LOW NOISE IS TO COOL THE SYSTEM TO LOWER THE T FACTOR. LIQUID NITROGEN BOILS AT  $-196^\circ C$  OR  $77^\circ K$ , BY COOLING DEVICES TO THIS TEMPERATURE, THE NOISE POWER IS REDUCED BY A FACTOR OF  $300/77 = 3.9$ .

# NOISE PROBLEMS


(with answers)

(T = 300°K)

- ①. WHAT IS THE HIGHEST BANDWIDTH THAT CAN BE USED TO KEEP THE NOISE POWER BELOW  $-140\text{dBm}$ ? ( $-140\text{dBm} = 10\text{aW} \rightarrow 2.4\text{kHz}$ )
- ②. FIND  $V_n$  FOR  $BW = 1\text{MHz}$  AND  $R = 1\text{M}\Omega$ . ALSO FIND  $P_n$  IN WATTS AND  $\text{dBm}$ . ( $129\text{uV}$ ,  $4.1\text{fW}$ ,  $-114\text{dBm}$ )
- ③. WHAT IS THE HIGHEST BANDWIDTH THAT CAN BE USED IN A  $50\Omega$  SYSTEM SO THAT THE NOISE VOLTAGE IS NO MORE THAN  $10\text{uV}_{\text{rms}}$ ? ( $121\text{MHz}$ )
- ④. IF A SYSTEM HAS A NOISE VOLTAGE OF  $1\text{uV}/\sqrt{\text{Hz}}$ , FIND THE NOISE VOLTAGE FOR A BANDWIDTH OF  $20\text{kHz}$  AND ALSO FOR A BANDWIDTH OF  $100\text{MHz}$ . (Ans  $141\text{uV}$ ,  $10\text{mV}_{\text{rms}}$ )
- ⑤. IF THE MEASURED NOISE (ON AN OSCILLOSCOPE) IS  $100\text{mV}_{\text{pp}}$  AND THE BANDWIDTH IS  $50\text{kHz}$ , WHAT IS THE NOISE VOLTAGE IN RMS AND IN RMS VOLTS PER ROOT HERTZ? ( $16.7\text{mV}$ ,  $74.7\text{uV}/\sqrt{\text{Hz}}$ )
- ⑥. IF THE BANDWIDTH IS  $1\text{Hz}$ , WHAT IS THE NOISE LEVEL IN  $\text{dBm}$ ? (Ans  $-174\text{dBm}$ )

# Resistor Noise

K. Kuhn  
4-21-04

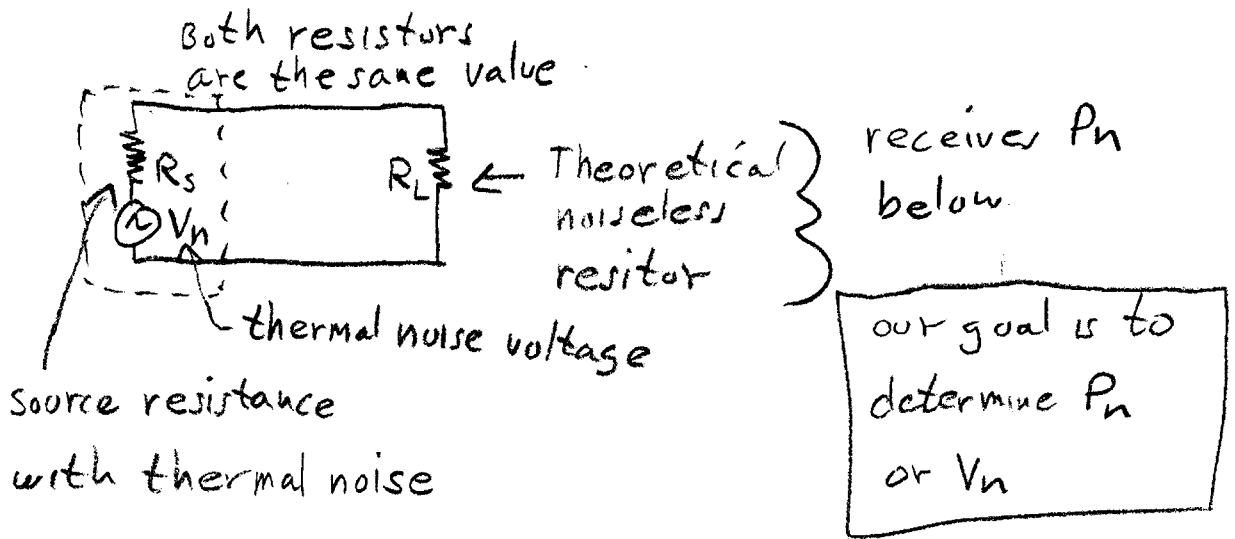

Noise voltage delivered to  $R_L = V_n \frac{R_L}{R_s + R_L} = \frac{V_n}{2}$

Noise power delivered to  $R_L = \frac{\left(\frac{V_n}{2}\right)^2}{R_L} \leftarrow = R$

Note that:

$P = \frac{V^2}{R}$  and  $V = \sqrt{PR}$

Thus:  $\frac{V_n^2}{4} = P_n R$  and  $V_n = \sqrt{4P_n R}$

$P_n = KTB$

$K = 1.38 \times 10^{-23} \text{ J/}^\circ\text{K}$  (Boltzmann's constant)  
 $T = \text{temperature in } ^\circ\text{K}$   
 $B = \text{Noise equivalent bandwidth in Hz}$

Thus:  $KTB$  has units of  $\text{J/s}$  or Watts

$V_n = \sqrt{4KTB R}$

$\text{Hz} = \frac{1}{\text{s}}$

↑ open circuit voltage